

LED RGBW Controller



Parameter:

RGBW Receiver:

- Model: M4-3A
- Power Input: 12-24Vdc
- Max Current Load: 3Ax4CH Max 12A
- Max Output Power: (0-36...72W)x4CH
- Working Temp.: -30°C-55°C
- Dimensions: L125xW33xH20(mm)
- Weight(N.W.): 60g


RGBW Remote:

- Model: M4/M8
- Working Voltage: 3Vdc (battery CR2032)
- Working Frequency: 433.92MHz
- Remote Distance: 40m-50m
- Working Temp.: -30°C-55°C
- Remote Dimensions: L104xW58xH9(mm)
- Remote Weight(N.W.): 42g




Wall-mounted


Dimensions:



Remote



Remote Holder

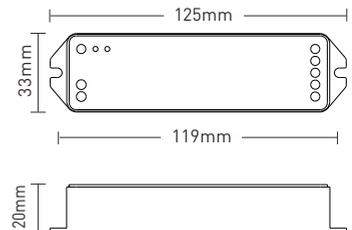



Receiver

Package:



Blister package

Operating Instruction for Remote:

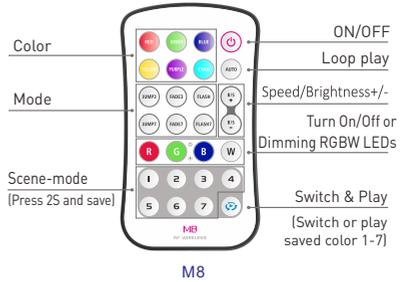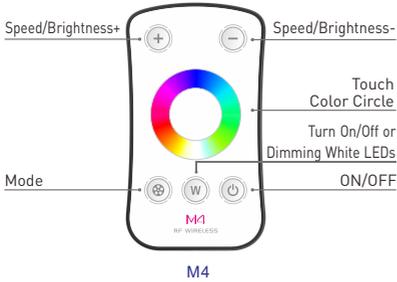

M4 Changing Mode Table

No.	Mode	No.	Mode
1	Static Red	7	Static White
2	Static Green	8	RGB Skipping
3	Static Blue	9	7 Colors Skipping
4	Static Yellow	10	RGB Color Smooth
5	Static Purple	11	Full-color Smooth
6	Static Cyan	12	Static Black

The Learning ID Method:

Remote has been matched to the receiver before leave factory, if deleted accidentally, you can learn ID as follow.

Learning ID: Short Press "ID learning button" on the M4-3A receiver, the running light is on, then press any key on M4/M8 remote, the running light flashes several times, activated.

Canceling ID: Press "ID learning button" on the M4-3A receiver for 5 seconds.

Operating Instruction for Receiver:



Wiring Diagram:

